


AIR DISTRIBUTION SUBMITTAL

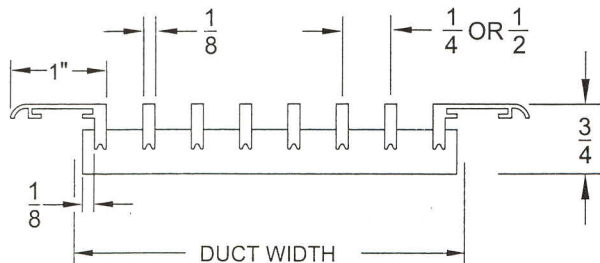

NUMBER OF BARS		
DUCT WIDTH	BAR SPACING	
	1/4"	1/2"
1 1/2	3	1
2	5	2
2 1/2	7	3
3	9	4
3 1/2	11	5
4	13	6
5	17	8
6	21	10
8	29	14
10	37	18
12	45	22
14	53	26
16	61	30
18	69	34
20	77	38
22	85	42
24	93	46

DBG-220

1/8" WIDE BAR
1/4" SPACING
0 DEG. DEFLECTION




DBG-225

1/8" WIDE BAR
1/4" SPACING
15 DEG. DEFLECTION






DBG-250

1/8" WIDE BAR
1/2" SPACING
0 DEG. DEFLECTION




DBG-255

1/8" WIDE BAR
1/2" SPACING
15 DEG. DEFLECTION

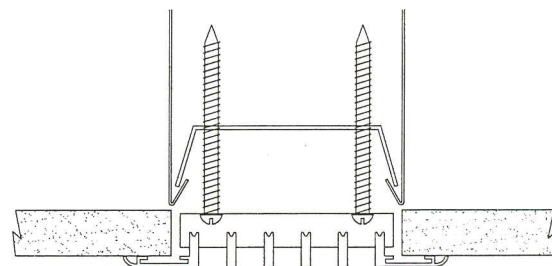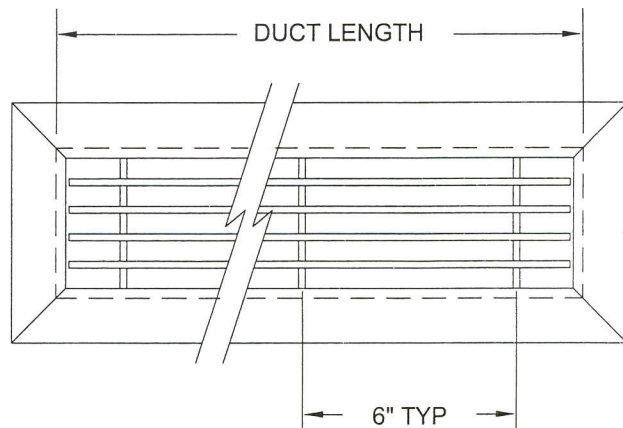

SURFACE MOUNT FASTENING

WITH CONCEALED MOUNT HARDWARE
(HEMMED DUCT REQUIRED)
NOT AVAILABLE WITH 1/4" BAR SPACING



SCREW FASTENING

COUNTERSUNK HOLES AND SCREWS PROVIDED



MITERED CORNER OPTIONS

CONTACT FACTORY

FEATURES

- ALL ALUMINUM CONSTRUCTION
- 1/8" WIDE FIXED POSITION BARS AT ZERO OR 15 DEG. DEFLECTION
- BAR CENTERLINE SPACINGS: 1/4" PENCIL-PROOF OR 1/2"
- END TERMINATIONS ARE MITERED
- MINIMUM DUCT WIDTH IS 1 1/2"
- MAXIMUM LENGTH PER SECTION IS 96"
- ALIGNMENT STRIPS PROVIDED FOR CONTINUOUS APPLICATIONS
- ALSO AVAILABLE AS CORE ONLY WITHOUT FLANGED FRAME
- PAINTED FINISH AVAILABLE IN NATURAL COLOR OR DONCO WHITE. ALSO AVAILABLE WITH MILL FINISH. CONTACT FACTORY FOR CLEAR ANODIZED OR OTHER SPECIAL COLORS AND FINISHES.

OPTIONS (SPECIFY)

- ☐ DUCT LENGTH
- ☐ DUCT WIDTH
- ☐ BAR SPACING 1/4" 1/2"
- ☐ DEFLECTION 0 DEG. 15 DEG.
- ☐ PAINTED NATURAL FINISH (STANDARD)
- ☐ PAINTED WHITE FINISH
- ☐ MILL FINISH
- ☐ CLEAR ANODIZED
- ☐ SURFACE MOUNT FASTENING
- ☐ SCREW FASTENING
- ☐ CORE ONLY

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____
LOCATION: _____
ARCHITECT: _____
ENGINEER: _____
CONTRACTOR: _____

DBG-200 SERIES BAR GRILLES MODELS DBG-220, 225, 250, 255

DRAWN BY
JLH

DATE
7-31-03

DWG. NO.
DBG-200



RAYMON
DONCO AIR DISTRIBUTION EQUIPMENT

P.O. BOX 250
ALBION, IOWA 50005
PH. (641) 488-2211 FAX (641) 488-2796
www.raymon-hvac.com