


END BRACKET DETAIL


INLET DIAMETER	DIFFUSER HEIGHT H
5,6	9 $\frac{1}{4}$
7,8,9	12 $\frac{7}{16}$
10	14

STANDARD DIFFUSER HEIGHTS ARE BASED ON INLET SIZE. CONTACT FACTORY FOR SPECIAL REQUIREMENTS.

MODEL NUMBER	DIFFUSER WIDTH W
J-11	1 $\frac{13}{16}$
J-21	3 $\frac{1}{16}$
J-22	4 $\frac{1}{8}$
J-31	4 $\frac{5}{16}$
J-32	5 $\frac{3}{8}$
J-41	5 $\frac{9}{16}$
J-42	6 $\frac{5}{8}$

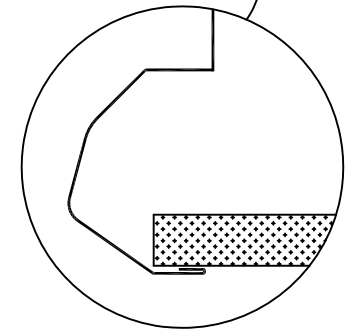

TILE FLANGE DETAIL

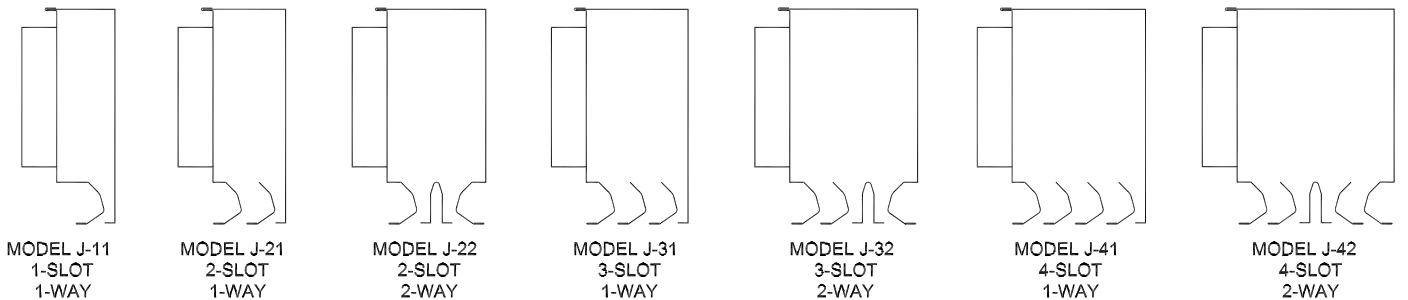

FEATURES

- FIXED VANE PROVIDES A DRAFTLESS AIR PATTERN OVER THE FULL RANGE OF FLOW. EXCELLENT FOR VARIABLE VOLUME.
- LOWER FLANGES PROVIDE TILE SUPPORT AS AN INTEGRAL PART OF THE DIFFUSER HOUSING.
- AVAILABLE IN NOMINAL LENGTHS FROM 24 TO 60 INCH.
- MATERIAL: 24 GAUGE GALVANNEALED STEEL.
- ALL EXPOSED SURFACES HAVE WHITE ENAMEL FINISH.
- CONTACT FACTORY FOR AVAILABILITY OF DIFFUSERS FOR SPECIAL CEILING APPLICATIONS.

OPTIONS (SPECIFY)

- NON-INSULATED
- INTERNAL INSULATION
- INLET DAMPER
- MODEL NUMBER
- NOMINAL LENGTH
- INLET SIZE

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

MODEL J-SERIES FIXED PATTERN PLENUM SLOT

DRAWN BY: RBJ DATE: 04-04-97 DWG. NO. J-14

RAYMON P.O. BOX 250 ALBION, IOWA 50005 www.raymon-hvac.com