

QUICK MOUNT UTILITY FRAME



The Quick Mount Utility Frames allow surface mount installation of ceiling diffusers in plaster or gypsum ceilings.

The special mounting brackets provide a secure installation to the ceiling. Diffusers or other devices may require independent support.


The standard 24" frame will accept 23 3/4" lay-in diffusers. This also allows access to service utilities above the ceiling by raising the diffuser and flexible duct.

FEATURES

- EXTRUDED ALUMINUM CONSTRUCTION WITH MECHANICALLY FASTENED MITERED CORNERS.
- WHITE FINISH STANDARD.
- EACH FRAME INCLUDES EIGHT MOUNTING BRACKETS AND SCREWS.
- STANDARD SIZES: 24 X 24, 12 X 12, 12 X 24.
- OTHER SIZES AND FASTENING METHODS ARE AVAILABLE. CONTACT FACTORY.

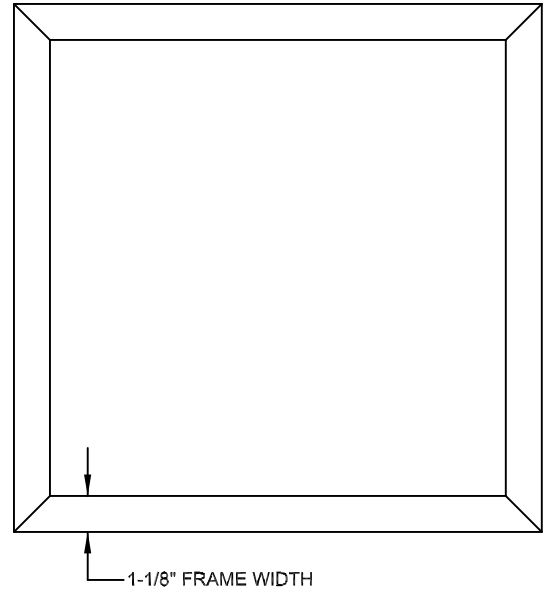

MOUNTING BRACKET IS ADJUSTABLE TO CEILINGS FROM 1/2 TO 7/8 INCH THICK.

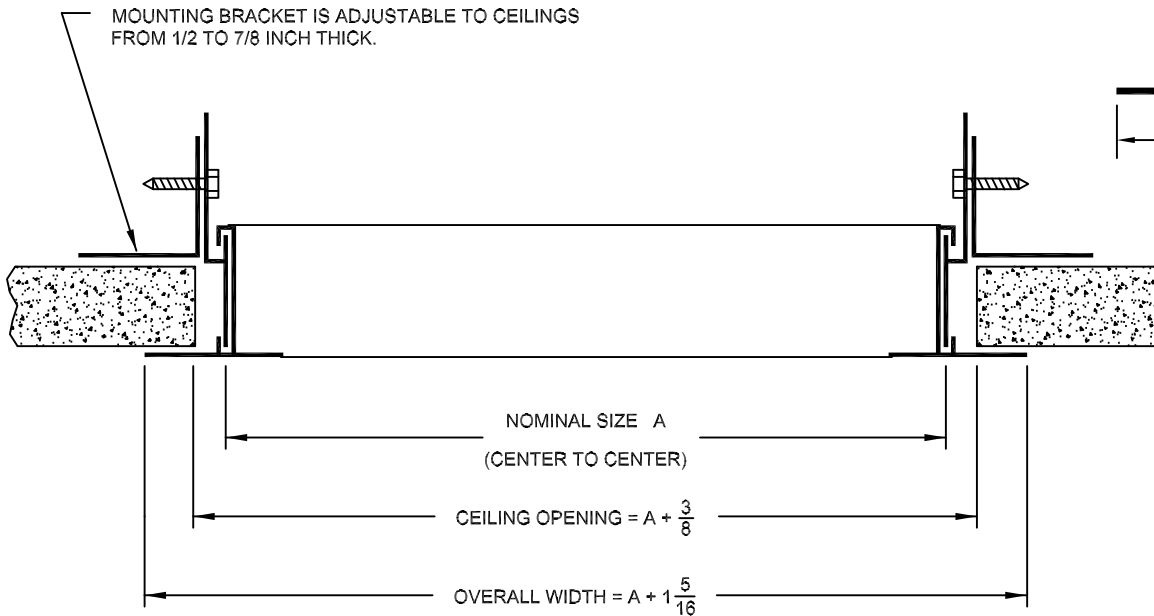

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

WHEN ORDERING NON-STANDARD SIZES, SPECIFY OVERALL DIFFUSER FACE DIMENSIONS THAT THE FRAMES ARE TO FIT.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

MODEL QMF
QUICK MOUNT TRIM FRAMES

DRAWN BY: RBJ DATE: 09-14-05 DWG. NO. QMF