

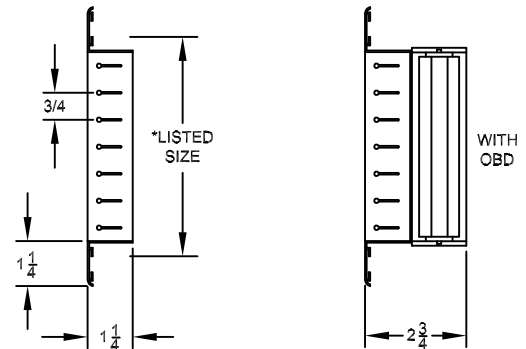
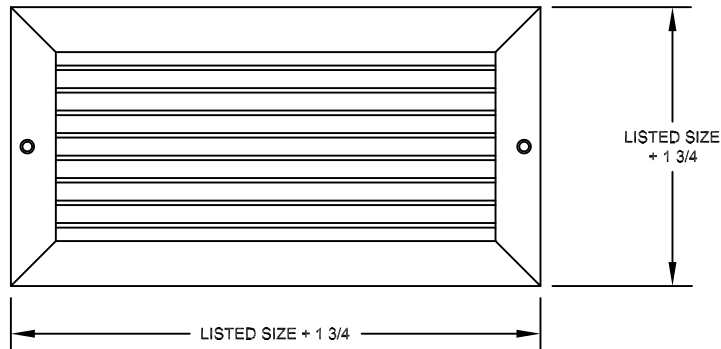





SINGLE DEFLECTION SUPPLY (RA-H SHOWN)


- ☐ RA-H HORIZONTAL
☐ RA-HD HORIZONTAL WITH DAMPER (OBD OPPOSED BLADE)




- ☐ RA-V VERTICAL
☐ RA-VD VERTICAL WITH DAMPER (OBD OPPOSED BLADE)

*LISTED SIZE = DUCT SIZE AND ROUGH OPENING SIZE

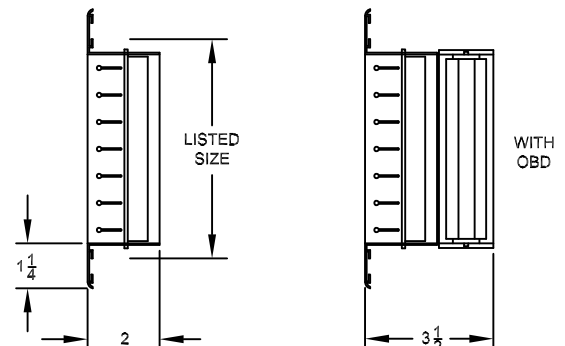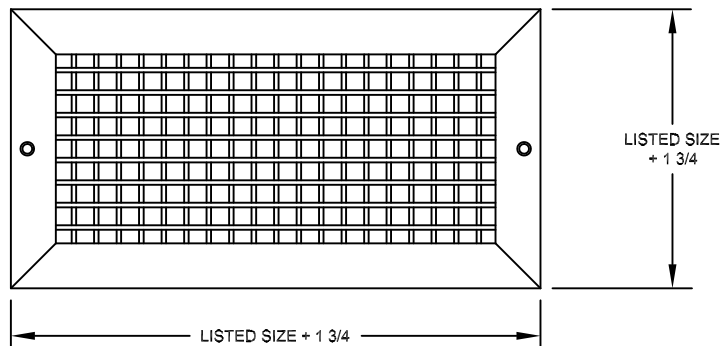DOUBLE DEFLECTION SUPPLY (RA-HV SHOWN)


- ☐ RA-HV HORIZONTAL FRONT BLADES
☐ RA-HVD HORIZONTAL FRONT BLADES WITH DAMPER (OBD OPPOSED BLADE)



- ☐ RA-VH VERTICAL FRONT BLADES
☐ RA-VHD VERTICAL FRONT BLADES WITH DAMPER (OBD OPPOSED BLADE)

FEATURES

- EXTRUDED ALUMINUM CONSTRUCTION
- STANDARD FINISH IS #26 WHITE
- INDIVIDUALLY ADJUSTABLE BLADES
- BLADE SPACING IS 3/4" CENTERS.
- SCREW HOLES ARE STANDARD

OPTIONS (SPECIFY)

- ____ MODEL (EX: RA-H)
 ____ LISTED SIZE (EX: 12X6)
 AVAILABLE IN 2" INCREMENTS TO MAX. 36"

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

MODEL RA SERIES

ALUMINUM GRILLES AND REGISTERS

DRAWN BY: RBJ DATE: 11-01-07 DWG. NO. RA

RAYMON P.O. BOX 250 ALBION, IOWA 50005 www.raymon-hvac.com