

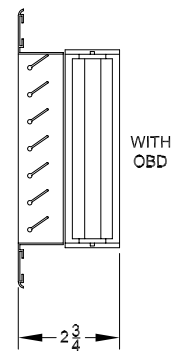


AIR DISTRIBUTION SUBMITTAL

FIXED 35 DEG. RETURN (RA-RH SHOWN)



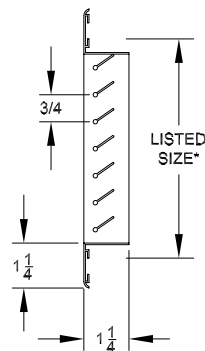


*LISTED SIZE = DUCT SIZE AND ROUGH OPENING SIZE

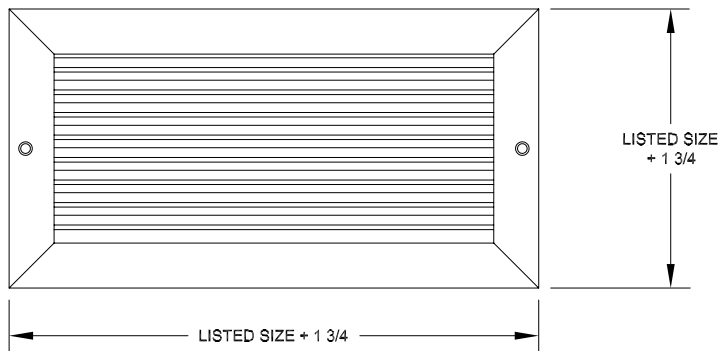

- ☐ RA-RH FIXED 35 DEG. HORIZONTAL
- ☐ RA-RHD FIXED 35 DEG. HORIZONTAL WITH DAMPER (OBD OPPOSED BLADE)

FIXED 0 DEG. RETURN (RA-RHS SHOWN)

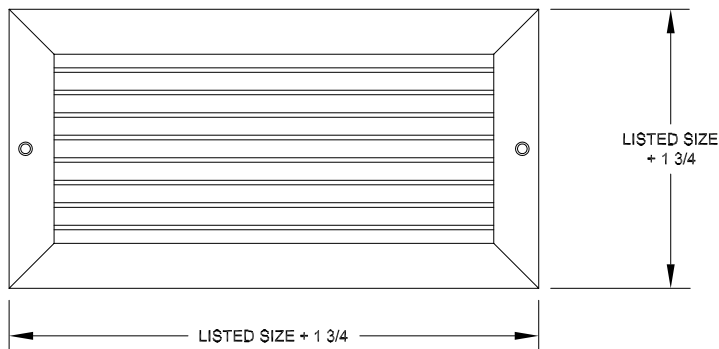

FEATURES

- EXTRUDED ALUMINUM CONSTRUCTION
- STANDARD FINISH IS #26 WHITE
- FIXED BLADES AT 0 OR 35 DEGREE
- BLADE SPACING IS 3/4" CENTERS.
- SCREW HOLES ARE STANDARD

OPTIONS (SPECIFY)

- _____ MODEL (EX: RA-RH)
- _____ LISTED SIZE (EX: 12X6)
- AVAILABLE IN 2" INCREMENTS TO MAX. 36"

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

MODEL RA ALUMINUM FIXED BLADE RETURN GRILLES AND REGISTERS

DRAWN BY
RBJ

DATE
11-12-07

DWG. NO.
RA-R

P.O. BOX 250
 ALBION, IOWA 50005
 PH. (641) 488-2211 FAX (641) 488-2796
 www.raymon-hvac.com



RAYMON
 DONCO AIR DISTRIBUTION EQUIPMENT