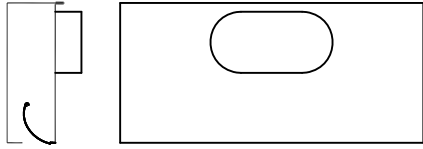
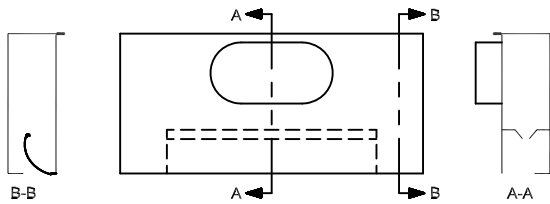
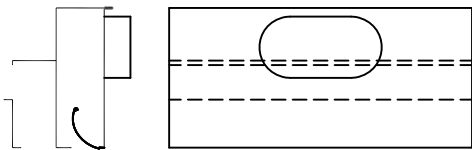
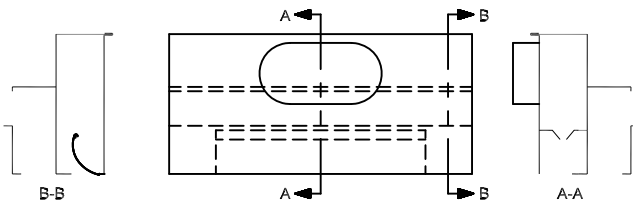

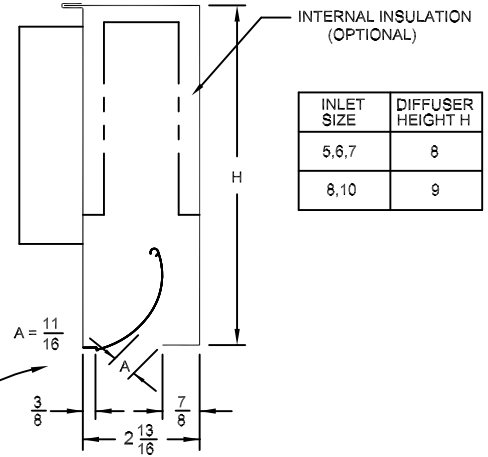
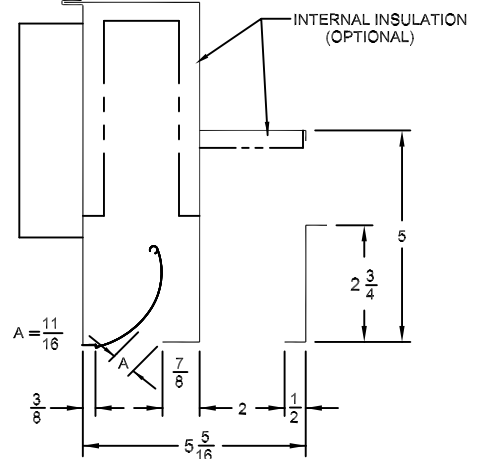


SUPPLY DIFFUSER MODEL SOST

SUPPLY WITH DOWNBLOW MODEL SOD

SUPPLY/RETURN MODEL SRCST

SUPPLY/RETURN WITH DOWNBLOW MODEL SRCD

FEATURES

- HIGH INDUCTION HORIZONTAL AIR FLOW
- CENTER DOWNBLOW OPTION PROVIDES A VERTICAL AIR PATTERN FOR EXTERIOR WALLS OR GLASS. ADJUSTABLE HINGE BLADES FOR VOLUME AND DIRECTION CONTROL. 12 INCH LENGTH STANDARD.
- SUPPLY/RETURN COMBINATION DIFFUSERS ALLOW ROOM AIR TO BE RETURNED TO CEILING PLENUM.
- NOMINAL LENGTHS FROM 24 TO 60 INCH. ACTUAL LENGTH IS NOMINAL MINUS 1/4 INCH.
- MATERIAL IS 24 GAUGE GALVANNEALED STEEL WITH EXPOSED SURFACES PAINTED FLAT BLACK.

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUPPLY DIFFUSER

SUPPLY/RETURN DIFFUSER

OPTIONS (SPECIFY)

- SUPPLY DIFFUSER (SOST)
- SUPPLY DIFFUSER W/DOWNBLOW (SOD)
- SUPPLY/RETURN COMBINATION (SRCST)
- SUPPLY/RETURN W/DOWNBLOW (SRCD)
- NON-INSULATED
- INTERNAL INSULATION
- EXTERNAL INSULATION
- NOMINAL LENGTH
- INLET SIZE
- ICE-TONG TYPE DOWNBLOW DEFLECTORS IN PLACE OF STANDARD HINGE TYPE

MODEL SRC SERIES PLENUM SLOT DIFFUSERS

DRAWN BY: RBJ DATE: 04-23-01 DWG. NO. SRC

RAYMON P.O. BOX 250 ALBION, IOWA 50005 www.raymon-hvac.com