



SUBMITTAL SHEET


ROUND CEILING DIFFUSER

MODEL AR2

ROUND CEILING DIFFUSER

SPUN STEEL • 2 POSITION

MODEL: AR2 • SUPPLY • TWO HORIZONTAL DISCHARGE PATTERNS

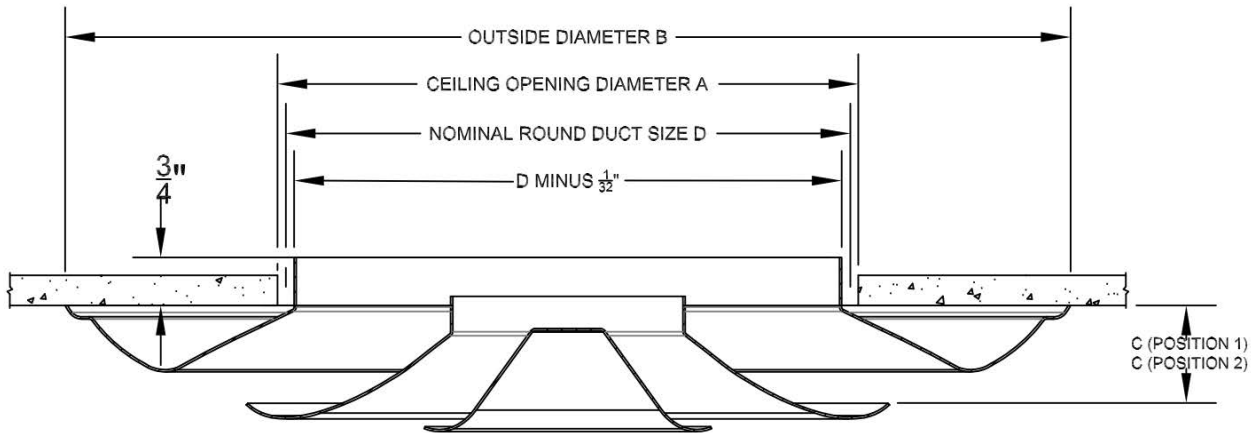

NOMINAL ROUND DUCT SIZE D	A	B	C (POS.1)	C (POS.2)	Max CFM @ NC 35
6	6 1/2	11 1/8	1 3/4	1 1/8	220
8	8 1/2	14 3/4	2 1/8	1 1/2	360
10	10 1/2	18 1/4	2 7/8	2 1/8	540
12	12 1/2	22	3 1/8	2 3/8	770
14	14 1/2	26	3 3/8	2 5/8	960


SPECIAL ORDER SIZES AVAILABLE (16, 18, 20, 24) CONTACT FACTORY

FEATURES

- UNIFORM 360 DEGREE DISCHARGE PATTERN
- 2-POSITION ADJUSTMENT FOR HEATING AND COOLING SEASONS
- TO ADJUST THE DIFFUSER, REMOVE THE TWO CENTER CONES AS A UNIT AND REPOSITION THE SIX SCREWS
- RETAINER CABLES ARE PROVIDED ON SIZES 12 AND LARGER TO ALLOW THE INNER CONES TO HANG WHILE ADJUSTING THE DIFFUSER
- WHITE POWDER COATED EPOXY FINISH
- OPTIONAL BUTTERFLY DAMPERS AVAILABLE

OPTIONS (SPECIFY)

- ☐ DUCT SIZE (6,8,10,12,14)
- ☐ BUTTERFLY DAMPER

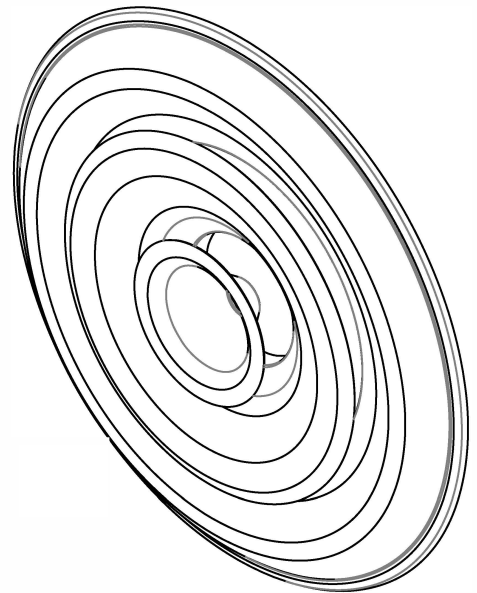

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

MODEL AR2

ROUND CEILING DIFFUSER

DRAWN BY: BMM DATE: 9-18-19 DWG. NO. AR2

RAYMON P.O. BOX 250 ALBION, IOWA 50005 www.raymon-hvac.com