



RAYMON

★ MADE IN USA ★

SUBMITTAL SHEET


WIDE FLOW LINEAR DIFFUSER

MODEL WF2000


PLASTER-IN APPLICATION (22)

(SHOWN WITH SNAP-ON PLENUM)

	SLOT WIDTH	FACE OA WIDTH	W PLENUM	OPENING WIDTH
WF2000-10	1	4.375	2.750	3.125
WF2000-15	1.5	4.875	3.250	3.625
WF2000-20	2	5.375	3.750	4.125
WF2000-25	2.5	5.875	4.250	4.625
WF2000-30	3	6.375	4.750	5.125

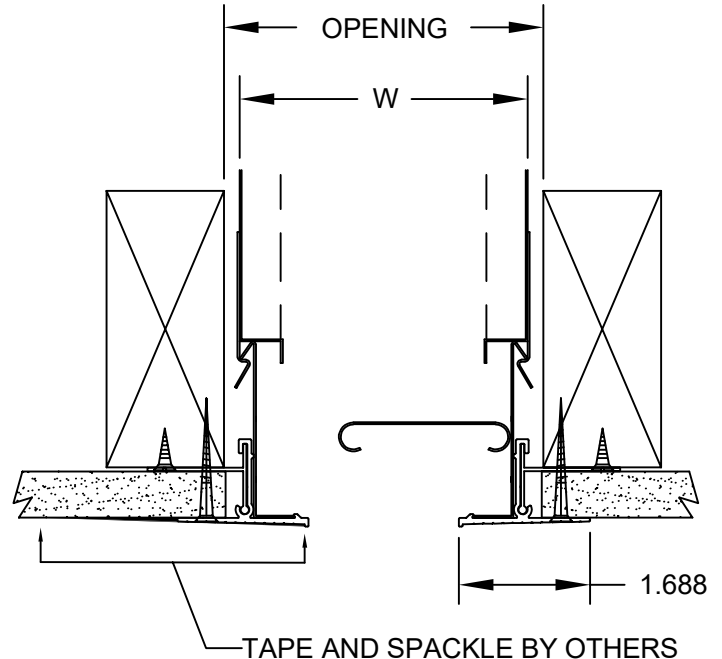

PATTERN CONTROL OPTIONS

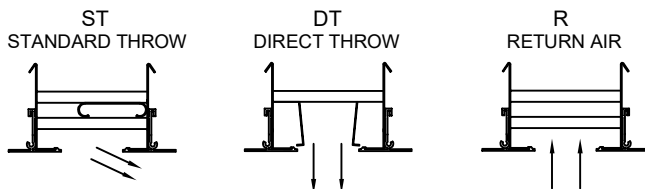


FEATURES

- EXTRUDED ALUMINUM FACE WITH STEEL INTERNAL COMPONENTS
- RECESSED MOUNTING BRACKETS AND COUNTERSINK SCREW HOLES ARE STANDARD. FLAT ENDCAPS ARE STANDARD.
- CHOICE OF SLIDING AIR BAR DEFLECTOR (ST) OR DIRECT THROW (DT) DEFLECTORS ARE AVAILABLE.
- RETURN OPTION ALSO AVAILABLE (NO DEFLECTORS)
- MAX LENGTH 96".

OPTIONS (SPECIFY)

- ☐ ST STANDARD THROW WITH 180 DEGREE ADJUSTMENT.
- ☐ DT DIRECT THROW WITH ADJUSTABLE DEFLECTION.
- ☐ R RETURN WITH NO PATTERN CONTROLLERS
- ___ LENGTH (FOR CONTINUOUS RUNS, SPECIFY TOTAL INCHES.)
- ___ NUMBER OF SLOTS
- ___ SLOT WIDTH

LENGTH DIMENSIONS

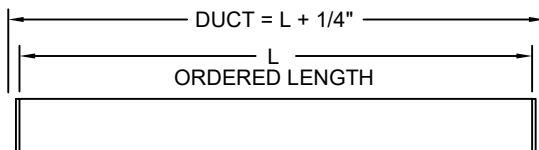

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

MODEL WF2000

WIDE FLOW LINEAR FOR TYPE 22 MUD-IN

DRAWN BY: BMM DATE: 06-02-25 DWG. NO. WF2000-22

RAYMON P.O. BOX 250 ALBION, IOWA 50005 www.raymon-hvac.com