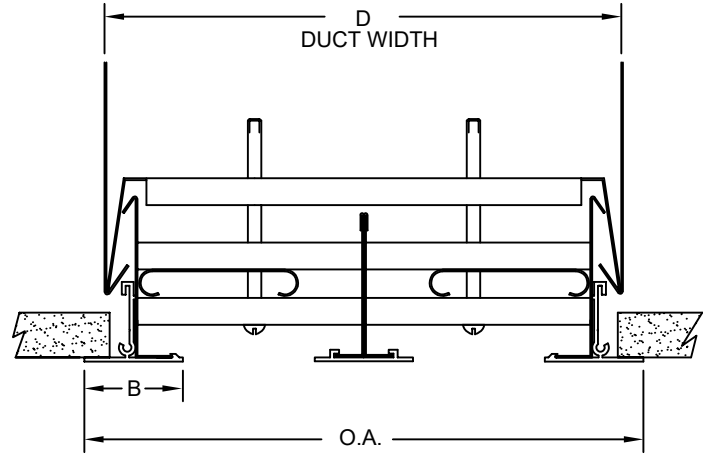
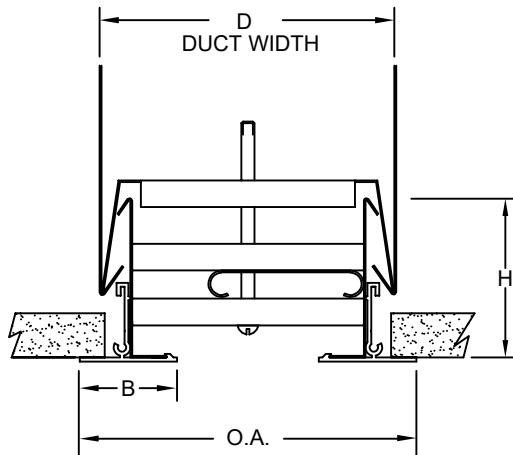
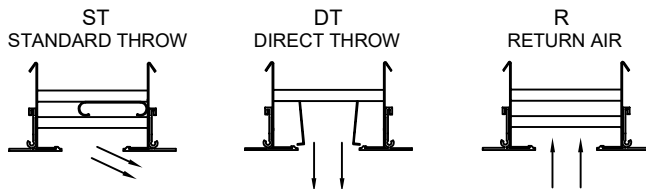
**RAYMON**

★ MADE IN USA ★


SUBMITTAL SHEET**MODEL WF2000-SM
WIDE FLOW LINEAR DIFFUSERS****SURFACE MOUNT (SM)**
(CONCEALED MOUNT WITH HEMMED PLENUM)

ONE SLOT					TWO SLOT				
SLOT WIDTH	B FLANGE	D DUCT WIDTH	OA OVERALL WIDTH	H HEIGHT	SLOT WIDTH	B FLANGE	D DUCT WIDTH	OA OVERALL WIDTH	H HEIGHT
1	1.375	3.250	3.750	2.250	1	1.375	5.625	6.125	2.250
1.5	1.375	3.750	4.250	2.250	1.5	1.375	6.625	7.125	2.250
2	1.375	4.250	4.750	2.250	2	1.375	7.625	8.125	2.250
2.5	2.031	6	6.563	3	2.5	2.031	11.125	11.688	3
3	2.031	6.500	7.063	3	3	2.031	12.125	12.688	3

RECOMMENDED ROUGH OPENING IS DUCT WIDTH TO 1/8" OVER.

PATTERN CONTROL OPTIONS**FEATURES**

- EXTRUDED ALUMINUM FACE WITH WHITE FINISH
- PATTERN CONTROLLERS AND INTERNAL COMPONENTS ARE 24 GA STEEL WITH BLACK FINISH.
- INDIVIDUAL LENGTHS UP TO 96" CAN BE PROVIDED.
- CONTINUOUS LENGTHS ARE FURNISHED WITH JOINER STRIPS.
- BLANK-OFFS AND PERFORATED LIGHT SHIELDS ARE AVAILABLE.
- MITER CORNERS ARE AVAILABLE FOR CEILING AND SIDEWALL.
- DISTRIBUTION PLENUMS AVAILABLE (SEE MODELS SDP & DP)

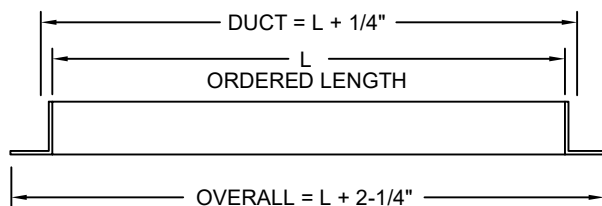LENGTH DIMENSIONS

FOR TEE BAR LAY-IN, ORDER AS NOMINAL LENGTH AND ADD SPECIAL NOTE INDICATING LAY-IN APPLICATION. OVERALL LENGTH WILL BE UNDERSIZED ACCORDINGLY.

OPTIONS (SPECIFY)

- ☐ ST STANDARD THROW WITH 180 DEGREE ADJUSTMENT.
- ☐ DT DIRECT THROW WITH ADJUSTABLE DEFLECTION.
- ☐ R RETURN WITH NO PATTERN CONTROLLERS
- ___ LENGTH (FOR CONTINUOUS RUNS, SPECIFY TOTAL INCHES.)
- ___ NUMBER OF SLOTS
- ___ SLOT WIDTH

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

**MODEL WF2000-SM
WIDE FLOW LINEAR DIFFUSERS**

DRAWN BY: RBJ DATE: 11-8-24 DWG. NO. WF2000-SM

RAYMON P.O. BOX 250 ALBION, IOWA 50005 www.raymon-hvac.com